

**SPLIT PHASE HYBRID INVERTER**

# MKL-HY-SP-10K-LV-US

10kW | 48V Low Voltage | Split Phase

MKL-HY-SP-10K-LV-US is a hybrid solar inverter for residential and commercial energy storage applications. It supports self-consumption, backup power, battery charging and intelligent energy management.

**KEY HIGHLIGHTS**

- **Rated Power:** 10kW
- **Battery:** 48V Low Voltage
- **Phase:** Split Phase
- **Protection:** IP66
- **MPPT:** 4 MPPT
- **Monitoring:** WiFi / 4G optional

**FEATURES**


<b>Pure Sine Wave</b> Stable output	<b>High PV Input</b> Wide PV range	<b>Multi MPPT</b> Flexible array
<b>Smart EMS</b> Energy management	<b>Battery Ready</b> BMS support	<b>Remote Monitor</b> WiFi / 4G

**CERTIFICATIONS**


- CE
- IEC 62109
- IEC 61000
- EN 50549
- RoHS



**PRODUCT CHARACTERISTICS**

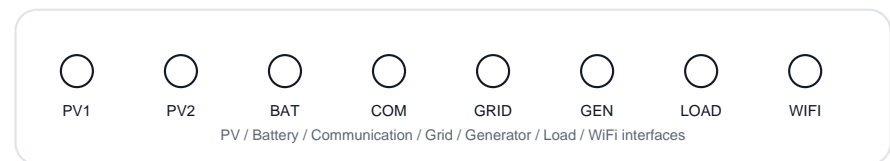

**LCD DISPLAY ICONS**

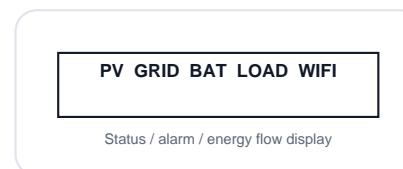

**BASIC SYSTEM ARCHITECTURE**



# Technical Specifications - Battery & PV Data

MKL-HY-SP-10K-LV-US

Model and Battery Input Data	
Model	MKL-HY-SP-10K-LV-US
Product Series	Split Phase Hybrid Inverter
Rated Power	10kW
Battery Platform	48V Low Voltage
Phase / Grid Type	Split Phase
Battery Type	Lithium / Lead-acid
Battery Voltage Range	43-63V
Rated Battery Voltage	48Vdc
Max. Charging Current	185A
Max. Discharging Current	185A
Charging Strategy for Li-ion Battery	Self-adaption to BMS
PV String Input Data	
Max. PV Access Power	13000W
Max. PV Input Power	13000W
Max. PV Input Voltage	500V
Start-up Voltage	125V
PV Input Voltage Range	150-500V
MPPT Voltage Range	150-500V
Rated PV Input Voltage	370V
Max. Operating PV Input Current	26A per MPPT
Max. Input Short-circuit Current	44A per MPPT
No. of MPP Trackers	4 MPPT

# Technical Specifications - AC & Efficiency Data

MKL-HY-SP-10K-LV-US

AC Input / Output Data	
Rated AC Input / Output Active Power	10000W
Max. AC Apparent Power	11000VA
Peak Power (off-grid)	2 times of rated power, 10s
Rated AC Input / Output Current	41.7A @240V
Max. AC Input / Output Current	52.1A @240V
Max. Continuous AC Passthrough	100A
Rated Input / Output Voltage	120/240V, 120/208V, 220V
Grid Connection Form	Split phase / L1+L2+N+PE
Rated Grid Frequency / Range	50Hz/45-55Hz, 60Hz/55-65Hz
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Total Harmonic Distortion (THDi)	<3% of nominal power
DC Injection Current	<0.5% In
Efficiency Data	
Max. Efficiency	97.6%
Euro Efficiency	96.5%
MPPT Efficiency	>99%
Battery Charge Efficiency	97.0%
Battery Discharge Efficiency	96.5%

# Technical Specifications - Protection & General Data

**MKL-HY-SP-10K-LV-US**

Equipment Protection	
DC Polarity Reverse Protection	Yes
PV Input Reverse Polarity Protection	Yes
AC Output Overcurrent Protection	Yes
AC Output Overvoltage Protection	Yes
AC Output Short-circuit Protection	Yes
Thermal Protection	Yes
DC Insulation Monitoring	Yes
Ground Fault Monitoring	Yes
Island Protection Monitoring	Yes
Residual Current Detection	Yes
Arc Fault Circuit Interrupter (AFCI)	Optional
Surge Protection Level	Type II (DC) / Type II (AC)
Interface and General Data	
Display	LCD + LED
Communication Interface	RS232 / RS485 / CAN
Monitor Mode	WiFi / Bluetooth / 4G / LAN optional
Generator Input / Smart Load	Supported by configuration
Parallel Operation	Up to 12 units
Operating Temperature Range	-40C to +60C, derating above 45C
Permissible Humidity	0-100%, non-condensing
Ingress Protection Rating	IP66
Installation	Wall-mounted
Cooling	Intelligent air cooling
Dimensions (W x H x D)	800 x 450 x 282 mm
Weight	52kg
Warranty	5 years standard, 10 years optional

## Contact & Support

 Email: [info@moonkiel.com](mailto:info@moonkiel.com)

WhatsApp: +86 13373650207 / +86 13812131613

No.1719-8, Huishan Avenue, Wuxi City, Jiangsu Province, China